



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and in accordance with the current certification process. It has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/1876/162/09/25/2208

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer: **İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.**
Barbaros Mah. Begonya Sk. No:3 Kat:16 Nida Kule Kuzey Ataşehir/İstanbul
Turkey

Description

PPE Type: protective glove against mechanical risks

Product reference: 154D-01

Glove description: 13G HPPE (high performance polyethylene)/ steel yarn/ polyester/
spandex liner with PU palm coating

Available sizes: 7 8 9 10 11


Pictures:

Item no.: 154D-01
Composition: 42% HPPE, 7% steel,
32% polyester, 6% spandex, 13% PU
MADE IN CHINA



LOT -----
XX/XXXX

İstanbul Ticaret İş güvenliği ve
Endüstriyel Ürünler A.Ş.
Barbaros Mah. Begonya Sk. No:3
Kat:16 Nida Kule Kuzey
Ataşehir/İstanbul
Turkey



Reference standard:

Levels of performance / class of protection

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.
« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

EN ISO 21420:2020 + A1:2024

compliant

EN 388:2016 + A1:2018

4 X 4 3 D

At the date of the certificate, the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the user instructions index 01 dated from October 2025.

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
William GELAS
Certification Manager



Date of first issue: 01 October 2025
Date of end of validity: 30 September 2030



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n# 5-0594
Scope available on:
www.cofrac.fr

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.

MANUFACTURER'S TECHNICAL FILE TO THE
PPE REGULATION 2016/425

Reference of the product	:	154D-01
Article code	:	/
Technical file index	:	01
Last update	:	October 2025

IDENTIFICATION

Reference of the product :	:	154D-01
Article code :	:	/
Basic Model		
Technical file index :	:	01
Last update :	:	October 2025

Manufacturer :

İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.

Barbaros Mah. Begonya Sk. No:3 Kat:16 Nida Kule Kuzey Ataşehir/İstanbul

Turkey

tel : +90 (216) 527 7356/ 127

fax : /

Factory :

Jiangsu Hanvo Safety Product Co., Ltd

HUANGSHAN ROAD,RUDONG NEW DEVELOPMENT ZONE,RUDONG
COUNTY,JIANGSU

CHINA

tel: 0086-513-81907309

fax: 0086-513-84536318

GLOVE DESCRIPTION

General glove description and intended use:

13G HPPE (high performance polyethylene)/ steel yarn/ polyester/ spandex liner with PU palm coating

This glove is designed against mechanical risks.

Type of coating finish : smooth

Visual description (picture back and palm sides) :



Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)

		Applicable
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>

Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m ²)	Gauges	Thickness
Palm		grey	PU			0.3mm
		black/ white	HPPE (high performance polyethylene)/ steel yarn/ polyester/ spandex	370g/m ²	13G	
Back		black/ white	HPPE (high performance polyethylene)/ steel yarn/ polyester/ spandex	370g/m ²	13G	
Cuff		black/ white	HPPE (high performance polyethylene)/ steel yarn/ polyester/ spandex/elastic	670g/m ²	13G	
Binding		purple/ green/ brown/ yellow/ grey	polyester			

PROTECTION SCOPE

This product meets the essential requirements of the Personal Protective Equipment Regulation (EU) 2016/425.

This glove is designed against mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN ISO 21420:2020 + A1:2024

Dexterity : 5

Available size range: 7 8 9 10 11

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 + A1 Annex B table B.1

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Mechanical hazard EN 388:2016 + A1:2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	X
Tear strength resistance	4
Puncture resistance	3
Cut Resistance method (EN ISO 13997)	D
Impact Protection	N/A

The levels of performance have been measured on the palm.


TEST REPORTS

EN ISO 21420+A1 + innocuousness	S250100253_3 S250100364_1 S210100807_1
EN 388	S250100253_3 S241111773_4

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 154D-01

Article Code : /

Size indicator

Pictograms related to risks against which protection is offered with performance levels



Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or serial/batch number :

Date of obsolescence (month/year) if applicable:

Marking example :


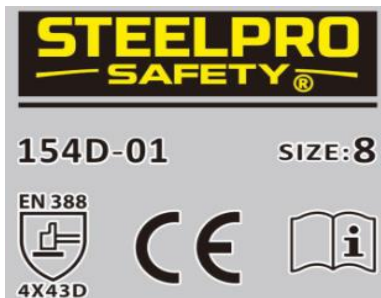


İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.
Barbaros Mah. Begonya Sk. No:3
Kat:16 Nida Kule Kuzey
Ataşehir/İstanbul
Turkey

Item no.: 154D-01
Composition: 42% HPPE, 7% steel,
32% polyester, 6% spandex, 13% PU

MADE IN CHINA

Marking of packaging example :



İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.
Barbaros Mah. Begonya Sk. No:3
Kat:16 Nida Kule Kuzey
Ataşehir/İstanbul
Turkey

Item no.: 154D-01
Composition: 42% HPPE, 7% steel,
32% polyester, 6% spandex, 13% PU

MADE IN CHINA

Method of marking on the glove :

print on the glove and label sewn on

Packaging suitable for transport:

12 pairs per bag + UIS ,10 bags per ctn

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Cleaning instructions:

This glove is not washable.

MEANS OF CONTROL

Firstly, IQC will take sample to monitor (ISO 2859, G1) the knitting gloves performance. They check the gloves on hand former, and monitor the glove color, total length, weight, visual defect Ext. If find abnormal will follow the non-conforming procedure to handle it.

Then, IPQC will check the product after dipping, they will check the total length, palm width, weight, and monitor the visual defects and performance, example: taste, dipping position Ext.

The next is packing process, QA will monitor the logo, bag, carton, label Ext. If ok, the glove will be send to warehouse.

In warehouse, FQC will check the final product.

This is a strict monitor procedure. We pick out the defects around 2%-4% in this process. We can ensure the quality according it. Then, we will ship the gloves to our customer site.

For EN388 test, we have been certified by SATRA, we have test machine in our laboratory. When we beginning a new order, we will test the gloves firstly. We also have the testing regularly during the production process. The testing includes abrasion(test every one year), cut, tear, puncture.

For EN ISO 21420 test, we asked our vendor to according to the request, and they cannot use any materials which contain Hazardous Substances. For each style, we send the final gloves to third party to monitor it regularly.

INSTRUCTIONS FOR USE

İstanbul Ticaret İş güvenliği ve Endüstriyel Ürünler A.Ş.

Barbaros Mah. Begonya Sk. No:3 Kat:16 Nida Kule Kuzey Ataşehir/İstanbul

Turkey

Glove reference : 154D-01


Article code: /

User notice index : 01

Last update : October 2025

Item no.: 154D-01
Composition: 42% HPPE, 7% steel,
32% polyester, 6% spandex, 13% PU

MADE IN CHINA



Glove description :

13G HPPE (high performance polyethylene)/ steel yarn/ polyester/ spandex liner with PU palm coating

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

LOT -----

XX/XXXX

İstanbul Ticaret İş güvenliği ve
Endüstriyel Ürünler A.Ş.
Barbaros Mah. Begonya Sk. No:3
Kat:16 Nida Kule Kuzey
Ataşehir/İstanbul
Turkey

The glove meets the requirements of the standard EN ISO 21420:2020 + A1:2024 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 7 8 9 10 11

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420+A1 Annex B.

Information about marking

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

CE The CE marking means that this product meets the requirements of the regulation 2016/425

Mechanical hazard - EN 388:2016 + A1:2018



4 X 4 3 D

Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	X	(on 5 maxi)
Tear resistance	4	(on 4 maxi)
Puncture resistance	3	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	D	(A to F)
Impact Protection		



Read carefully the instructions for use provided with the product

Protection limit:

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear...).

Mechanical protection:

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

This glove is not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : www.istanbulticaret.com